


WIDE BODY CARGO (WB)

FOR HEAVY DUTY LOADS

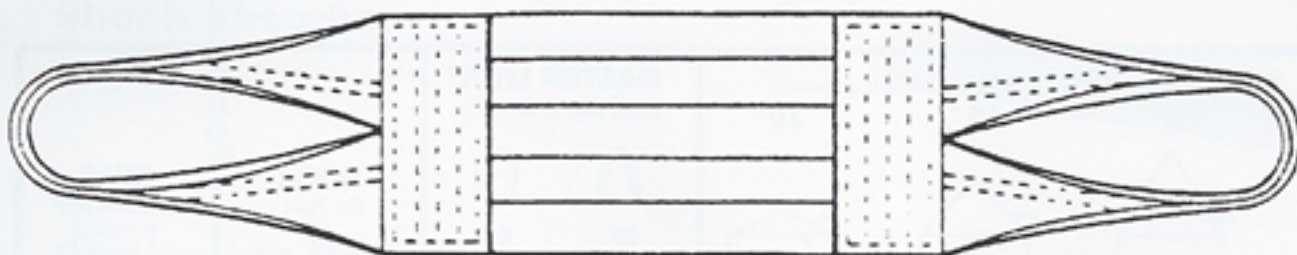


WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS		EYE LENGTH	EYE MATERIAL WIDTH	WEIGHT 5' BASE (LBS.)	(LBS) ADD/FT.
			90° BASKET	30° BASKET				
8"	908WB1	1	22500	11300	12"	2"	3.50	.44
8"	908WB2	2	42000	21000	12"	2"	6.00	.88
10"	910WB1	1	28000	14000	15"	2 1/2"	4.40	.60
10"	910WB2	2	52500	26300	15"	2 1/2"	8.20	1.30
12"	912WB1	1	34000	17000	18"	2"	5.30	.70
12"	912WB2	2	63000	31500	18"	3"	9.50	1.50
16"	916WB1	1	44000	22000	24"	2 3/4"	7.90	1.10
16"	916WB2	2	72500	36800	24"	4"	13.60	1.95
20"	920WB1	1	51000	25500	30"	3 1/2"	10.90	1.45
20"	920WB2	2	80000	40000	30"	5"	18.30	2.50
24"	924WB1	1	56500	28250	36"	4"	10.80	1.80
24"	924WB2	2	88500	44250	36"	6"	18.60	3.60

NOTE: Angles of less than 30° will not be used

REFER TO ANGLE EFFICIENCY CHART

ATTACHED EYE (AE)

FOR LIGHT DUTY LOADS

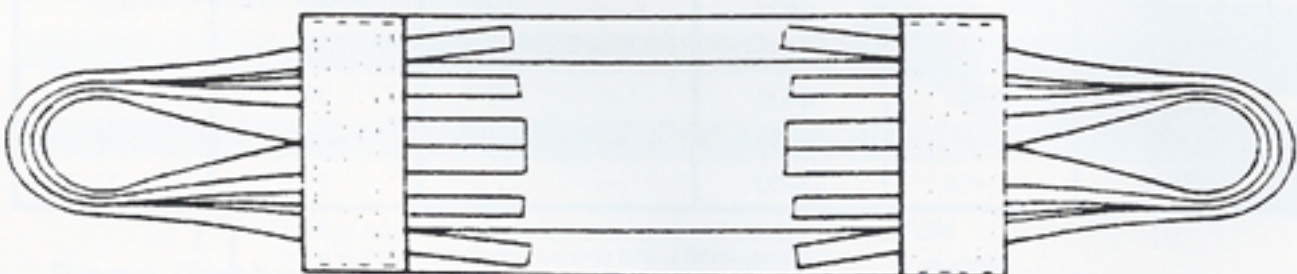

WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS		EYE LENGTH	EYE MATERIAL WIDTH	WEIGHT 5' BASE (LBS.)	(LBS) ADD/FT.
			90° BASKET	30° BASKET				
8"	908AE1	1	3000	1500	10"	1"	2.30	.50
8"	908AE2	2	6000	3000	10"	1"	2.80	1.00
10"	910AE1	1	3000	1500	12"	1"	2.60	.50
10"	910AE2	2	6000	3000	12"	1"	3.20	1.00
12"	912AE1	1	3000	1500	12"	1"	2.90	.50
12"	912AE2	2	6000	3000	12"	1"	3.50	1.00
16"	916AE1	1	5000	2500	12"	2"	4.30	.70
16"	916AE2	2	10000	5000	12"	2"	5.00	1.40
20"	920AE1	1	5000	2500	18"	2"	5.90	.70
20"	920AE2	2	10000	5000	18"	2"	6.40	1.40
24"	924AE1	1	5000	2500	18"	2"	7.10	.70
24"	924AE2	2	10000	5000	18"	2"	7.80	1.40

NOTE: Angles of less than 30° will not be used

REFER TO ANGLE EFFICIENCY CHART

! WARNING!

Observe rated capacity.
Work load limits will be reduced when less than 90° from horizontal (See Efficiency Chart) Angles of less than 30° are not to be used. Inspect before use. Additional requirements and safe operating practices are outlined in current OSHA, Federal Register Part 29, 1910.184 and ASME B30.9 c-2000. Death or injury can occur from improper use or maintenance!

S-Y-N-T-H-E-T-I-C-S-I-N-G-S