



# EYE & EYE SLINGS

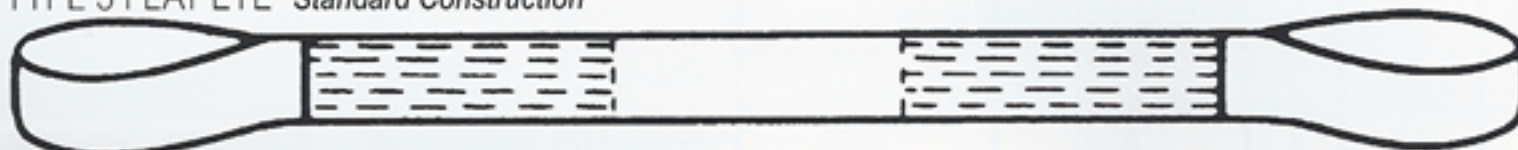


TYPE 3 FLAT EYE \*Standard Construction

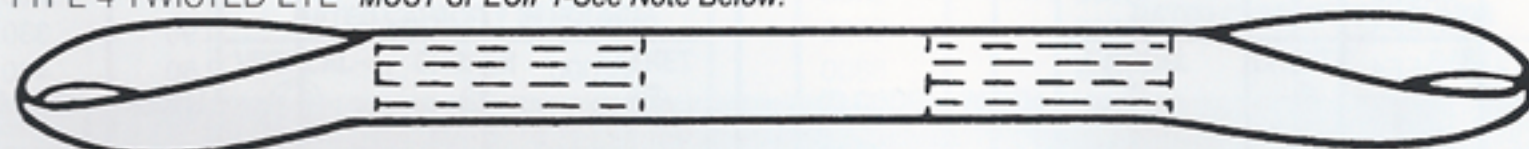

TYPE 4 TWISTED EYE \*MUST SPECIFY-See Note Below!



## MEDIUM DUTY (600 WEBBING)

WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS			INSIDE EYE SIZE LAYING FLAT	WEIGHT IN LBS.	
			VERTICAL 	CHOKER 	BASKET 		5' base	add/ft
1"	61EE1	1	1200	900	2400	9"	.40	.043
1"	61EE2	2	2400	1900	4800	9"	.50	.086
1"	61EE3	3	3600	2900	7200	9"	.68	.129
1"	61EE4	4	4800	3800	9600	9"	.86	.172
1 3/4"	6175EE1	1	2100	1600	4200	9"	.53	.063
1 3/4"	6175EE2	2	4200	3200	8400	9"	.75	.128
2"	62EE1	1	2400	1900	4800	9"	.68	.084
2"	62EE2	2	4800	3800	9600	9"	.95	.168
2"	62EE3	3	7000	5600	14000	12"	1.45	.252
2"	62EE4	4	8900	7100	17800	12"	1.90	.336
3"	63EE1	1	3600	2900	7200	12"	1.14	.140
3"	63EE2	2	6500	5200	13000	12"	1.63	.280
3"	63EE3	3	10000	8000	20000	15"	2.43	.420
3"	63EE4	4	13300	10700	26600	15"	3.23	.560
4"	64EE1	1	4800	3800	9600	12"	1.40	.172
4"	64EE2	2	8600	6900	17200	12"	1.99	.344
4"	64EE3	3	13000	10400	26000	15"	3.05	.516
4"	64EE4	4	17000	13800	34000	15"	4.10	.688
6"	66EE1	1	7200	5800	14400	12"	2.13	.255
6"	66EE2	2	12200	9800	24400	15"	2.90	.510
6"	66EE3	3	18400	14700	36800	18"	4.33	.765
6"	66EE4	4	24000	19200	48000	18"	5.77	1.020

Observe rated capacity.

**! WARNING!**

Work load limits will be reduced when less than 90° from horizontal (See Efficiency Chart) Angles of less than 30° are not to be used. Inspect before use. Additional requirements and safe operating practices are outlined in current OSHA, Federal Register Part 29, 1910.184 and ASME B30.9 c-2000. Death or injury can occur from improper use or maintenance!

NOTE: Standard eye construction is Type 3 flat eyes  
When requiring twisted eyes, must specify Type 4  
Tapered eyes on all sling widths 3" and larger


NOTE: Angles of less than 30° will not be used  
REFER TO ANGLE EFFICIENCY CHART

MEDIUM EYE AND EYE


FALCON SLINGS

# EYE & EYE SLINGS

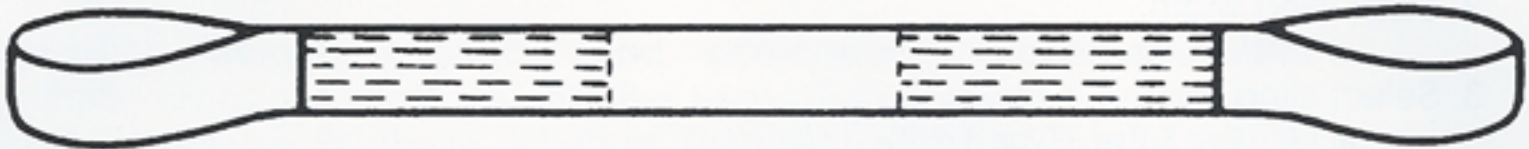


TYPE 3 FLAT EYE \*Standard Construction

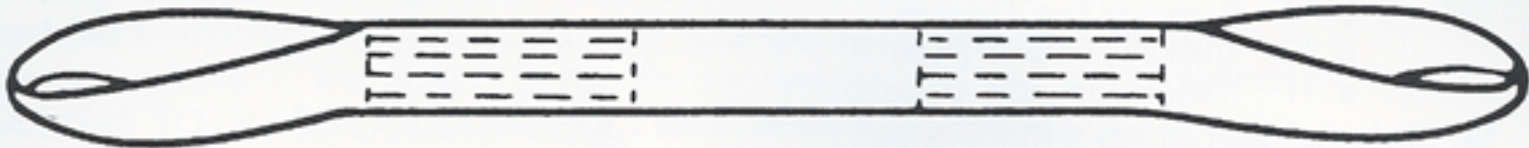

TYPE 4 TWISTED EYE \*MUST SPECIFY-See Note Below!




## HEAVY DUTY (900 WEBBING)

WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS			INSIDE EYE SIZE LAYING FLAT	WEIGHT IN LBS.	
			VERTICAL 	CHOKER 	BASKET 		3' base	add/ft
1"	91EE1	1	1600	1200	3200	9"	.42	.056
1"	91EE2	2	3200	2600	6400	9"	.68	.112
1"	91EE3	3	4100	3300	8200	9"	1.00	.160
1"	91EE4	4	5500	4400	11000	9"	1.30	.224
2"	92EE1	1	3200	2500	6400	9"	.84	.110
2"	92EE2	2	6400	5100	12800	9"	1.30	.220
2"	92EE3	3	8200	6600	16400	12"	1.90	.330
2"	92EE4	4	11000	8800	22000	12"	2.50	.440
3"	93EE1	1	4800	3800	9600	12"	1.40	.180
3"	93EE2	2	8900	7200	17800	12"	2.16	.350
3"	93EE3	3	12300	9900	24600	15"	3.13	.520
3"	93EE4	4	17800	14400	35600	15"	4.10	.700
4"	94EE1	1	6400	5100	12800	12"	1.75	.222
4"	94EE2	2	11500	9200	23000	12"	2.45	.444
4"	94EE3	3	15300	12200	30600	15"	3.85	.666
4"	94EE4	4	23000	18000	46000	15"	5.20	.888
5"	95EE1	1	8000	6400	16000	12"	2.46	.274
5"	95EE2	2	13600	10900	27200	15"	3.28	.548
5"	95EE3	3	19000	15000	38000	18"	4.80	.822
5"	95EE4	4	27200	20400	54400	18"	6.35	1.090
6"	96EE1	1	9600	7700	19200	12"	2.78	.330
6"	96EE2	2	16300	13000	32600	15"	3.78	.662
6"	96EE3	3	23000	18400	46000	18"	5.71	.993
6"	96EE4	4	32600	24500	65200	18"	7.65	1.320
8"	98EE1	1	12800	10200	25600	18"	4.06	.470
8"	98EE2	2	22000	17600	44000	18"	5.47	.960
8"	98EE3	3	33000	24750	66000	24"	8.18	1.410
8"	98EE4	4	44000	33000	88000	24"	10.90	1.880
10"	910EE1	1	16000	12800	32000	18"	5.23	.596
10"	910EE2	2	24000	19200	48000	18"	7.05	1.190
10"	910EE3	3	36000	28800	72000	24"	10.65	1.780
10"	910EE4	4	48000	38400	96000	24"	14.25	2.380
12"	912EE1	1	19200	15360	38400	24"	6.45	.734
12"	912EE2	2	26900	21500	53800	24"	8.67	1.470
12"	912EE3	3	40320	32250	90640	30"	13.33	2.200
12"	912EE4	4	53700	43000	107400	30"	18.00	2.930

**NOTE:** Standard eye construction is Type 3 flat eyes  
 When requiring twisted eyes, must specify Type 4  
 Tapered eyes on all sling widths 3" and larger

**NOTE:** Angles of less than 30° will not be used  
 REFER TO ANGLE EFFICIENCY CHART

**Observe rated capacity.**  
 **WARNING!**  
 Work load limits will be reduced when less than 90° from horizontal (See Efficiency Chart) Angles of less than 30° are not to be used. Inspect before use. Additional requirements and safe operating practices are outlined in current OSHA, Federal Register Part 29, 1910.184 and ASME B30.9 c-2000. Death or injury can occur from improper use or maintenance!