



# TRIANGLE / CHOKER WEB SLINGS




TYPE 1 - TRIANGLE / CHOKER

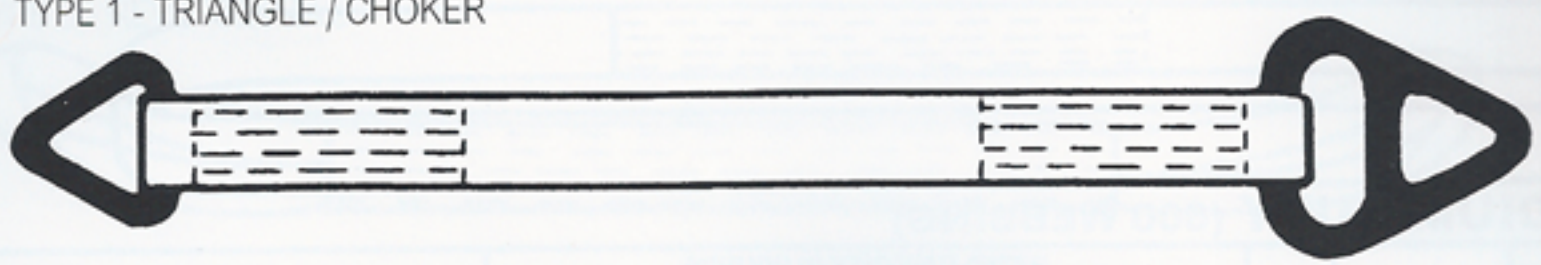

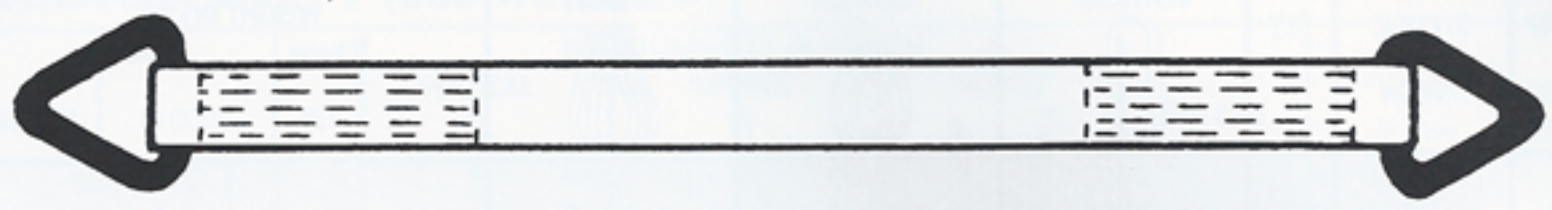


TYPE 2 - TRIANGLE / TRIANGLE



## MEDIUM DUTY (600 WEBBING)

WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS			WEIGHT IN LBS.	
			VERTICAL 	CHOKER 	BASKET 	5' base	add/ft
2"	62TC1	1	2400	1900	4800	3.96	.08
3"	63TC1	1	3600	2700	7200	6.18	.15
4"	64TC1	1	4800	3600	9600	8.87	.18
6"	66TC1	1	7200	5400	14400	14.47	.25
2"	62TC2	2	4800	3800	9600	4.10	.16
3"	63TC2	2	6500	4900	13000	6.76	.30
4"	64TC2	2	8600	6500	17200	9.44	.36
6"	66TC2	2	12200	9200	24400	14.88	.50

## HEAVY DUTY (900 WEBBING)

WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS			WEIGHT IN LBS.	
			VERTICAL 	CHOKER 	BASKET 	5' base	add/ft
2"	92TC1	1	3200	2500	6400	4.08	.12
3"	93TC1	1	4800	3800	9600	6.67	.18
4"	94TC1	1	6400	5100	12800	9.44	.22
6"	96TC1	1	9600	7600	19200	15.18	.33
2"	92TC2	2	6400	5000	12800	4.61	.21
3"	93TC2	2	8900	7100	17800	7.40	.36
4"	94TC2	2	11200	9000	22400	10.33	.44
6"	96TC2	2	16300	13100	32600	15.90	.66

**NOTE:** Steel fittings supplied as standard.  
 Aluminum forged fittings available.  
 Special order on medium duty 600 webbing only.  
 Also available in polyester.

**NOTE:** Angles of less than 30° will not be used  
**REFER TO ANGLE EFFICIENCY CHART**

**WARNING:**  
 Never use aluminum fittings where fumes, vapors, mists or liquids of caustics are present.

**Observe rated capacity.**

**! WARNING!**

Work load limits will be reduced when less than 90° from horizontal (See Efficiency Chart). Angles of less than 30° are not to be used. Inspect before use. Additional requirements and safe operating practices are outlined in current OSHA, Federal Register Part 29, 1910.184 and ASME B30.9 c-2000. Death or injury can occur from improper use or maintenance!