


# WIDE BODY CARGO (WB)

FOR HEAVY DUTY LOADS

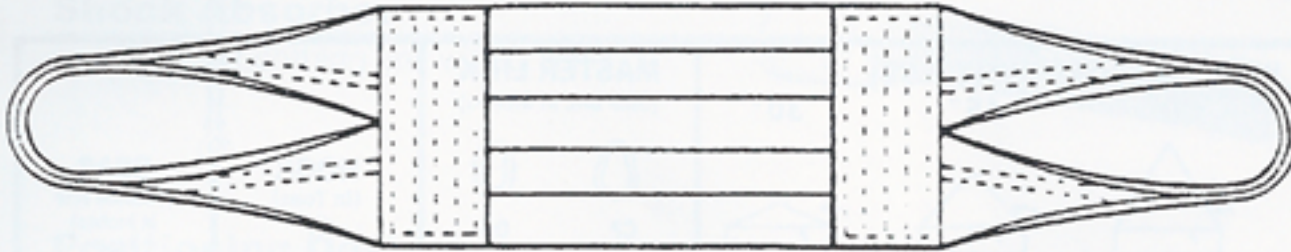


WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS		EYE LENGTH	EYE MATERIAL WIDTH	WEIGHT 5' BASE (LBS.)	(LBS) ADD/FT.
			90° BASKET	30° BASKET				
8"	908WB1	1	22500	11300	12"	2"	3.50	.44
8"	908WB2	2	42000	21000	12"	2"	6.00	.88
10"	910WB1	1	28000	14000	15"	2 1/2"	4.40	.60
10"	910WB2	2	52500	26300	15"	2 1/2"	8.20	1.30
12"	912WB1	1	34000	17000	18"	2"	5.30	.70
12"	912WB2	2	63000	31500	18"	3"	9.50	1.50
16"	916WB1	1	44000	22000	24"	2 3/4"	7.90	1.10
16"	916WB2	2	72500	36800	24"	4"	13.60	1.95
20"	920WB1	1	51000	25500	30"	3 1/2"	10.90	1.45
20"	920WB2	2	80000	40000	30"	5"	18.30	2.50
24"	924WB1	1	56500	28250	36"	4"	10.80	1.80
24"	924WB2	2	88500	44250	36"	6"	18.60	3.60

NOTE: Angles of less than 30° will not be used

REFER TO ANGLE EFFICIENCY CHART

# ATTACHED EYE (AE)

FOR LIGHT DUTY LOADS

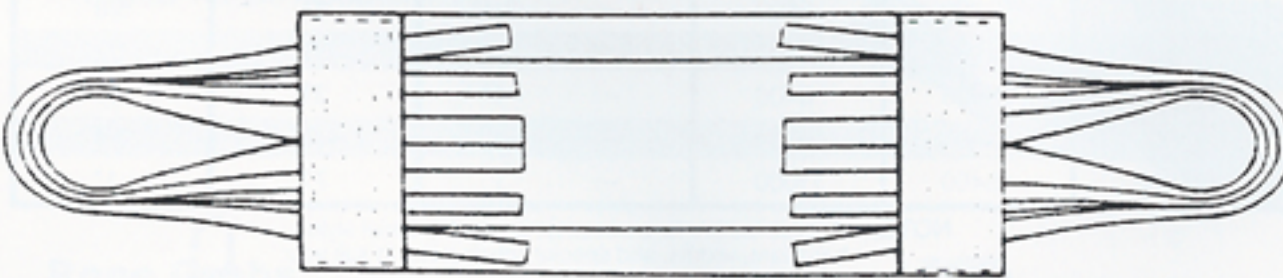

WIDTH	ID CODE	PLY	RATED CAPACITY IN POUNDS		EYE LENGTH	EYE MATERIAL WIDTH	WEIGHT 5' BASE (LBS.)	(LBS) ADD/FT.
			90° BASKET	30° BASKET				
8"	908AE1	1	3000	1500	10"	1"	2.30	.50
8"	908AE2	2	6000	3000	10"	1"	2.80	1.00
10"	910AE1	1	3000	1500	12"	1"	2.60	.50
10"	910AE2	2	6000	3000	12"	1"	3.20	1.00
12"	912AE1	1	3000	1500	12"	1"	2.90	.50
12"	912AE2	2	6000	3000	12"	1"	3.50	1.00
16"	916AE1	1	5000	2500	12"	2"	4.30	.70
16"	916AE2	2	10000	5000	12"	2"	5.00	1.40
20"	920AE1	1	5000	2500	18"	2"	5.90	.70
20"	920AE2	2	10000	5000	18"	2"	6.40	1.40
24"	924AE1	1	5000	2500	18"	2"	7.10	.70
24"	924AE2	2	10000	5000	18"	2"	7.80	1.40

NOTE: Angles of less than 30° will not be used

REFER TO ANGLE EFFICIENCY CHART

## ! WARNING!

Observe rated capacity.  
Work load limits will be reduced when less than 90° from horizontal (See Efficiency Chart). Angles of less than 30° are not to be used. Inspect before use. Additional requirements and safe operating practices are outlined in current OSHA, Federal Register Part 29, 1910.184 and ASME B30.9 c-2000. Death or injury can occur from improper use or maintenance!

S-Y-N-T-H-E-T-I-C-S-I-N-G-S